

Stofkaart

Gaber



BEKIJK ALLE PRODUCTEN ONLINE

Productoverzicht

Per product zie je de beschikbare stoffen.

Let op: Gaber heeft een eigen kleurselectie en is per kleur op bijna alle modellen vanaf 4 stuks leverbaar. Vanaf 10 stuks zijn alle kleuren mogelijk (tegen meerprijs).

Een andere stof gewenst? Dat kan op aanvraag vanaf 10 stuks.

Stoelen - volledig gestoffeerd



Stoelen - opdekstofferings



Krukken - volledig gestoffeerd



Krukken - opdekstoffering



Lounge/banken - volledig gestoffeerd



King is geschikt voor alle producten.

K King Fabric / Tessuto King



- Composition: 100% POLYESTER - TREVIRA CS
- Abrasion: UNI EN ISO 12947-2 80.000 Cycle Martindale $\pm 10\%$
- Light Resistance-Xenotest: UNI EN ISO 105-B02 / 6 (tol from 5 to 8)
- Fire proof: UNI 9174 - 8456 Class C1, UNI 9175 Class 1, DIN 4102 Class B1, NF 92501-7 Class M1, NF D 60013, 11M (UNI 9175) Class AM18, EN 1021-1 & 2, BS Crib 5, BS 7176 Class Medium Hazard, EN 13773 Class 1, OENORM 3800-1 Class B1,Q1,TR1, California TB117, USA NFPA 701, USA NFPA 260, IMO A 652 (16) Part 8 Upholstery
- Maintenance: Standard 60° C cotton cycle.

Visit www.fidivi.com for complete colours range / Visionate la completa gamma colori su www.fidivi.com

Ecopelle kunstleer is geschikt voor:

Basket/Brave, Dame/Combo, Kanvas/Point, Jubel/Vertica, Alhambra, Nuta/Hailey opdek, Nuta/Hailey lounge, Epica/Capice, To-Go, Social-ize/Sally, Panky/Set-Up, Salt/Pepper

E Simil leather Aurea / Ecopelle Aurea



- Composition: 72% PVC - 3% PU - 25% COTTON
- Abrasion: EN ISO 5470-2 100.000 Cycle Martindale
- Light Resistance-Xenotest: UNI EN ISO 105-B02 / 6
- Fire proof: UNI 9175 classe 1IM, EN 1021-1, EN 1021-2, BS 5852-1 cigarette test, BS 5852-1 match test BS 5852 crib 5, TB 117:2013, IMO res. A.652(16)
- Maintenance: Dust gently or pass the surface with a damp cloth.

Visit www.flukso.it for complete colours range / Visionate la completa gamma colori su www.flukso.it

Jewel is geschikt voor:

Honami, Nuta full stoel, Nuta full armstoel, Nuta full plus, Nuta full kruk



J Jewel Fabric / Tessuto Jewel



J1

J2

J3

J4

J5



J6

J7

J8

J9

- Composition: 100% PES
- Abrasion: UNI EN ISO 12947-2 - <100.000 Martindale cycles
- Fire proof: UNI 9175 classe 1/M
EN 1021-1, EN 1021-2, CRIB 5
- Maintenance: Standard 60° C cotton cycle.

Visit www.flukso.it for complete colours range / Visionate la completa gamma colori su www.flukso.it

Chill is geschikt voor:

Honami, Nuta full stoel, Nuta full armstoel, Nuta full plus, Nuta full kruk



H Chill Fabric / Tessuto Chill




H 1

H 2

H 3

H 4

H 5

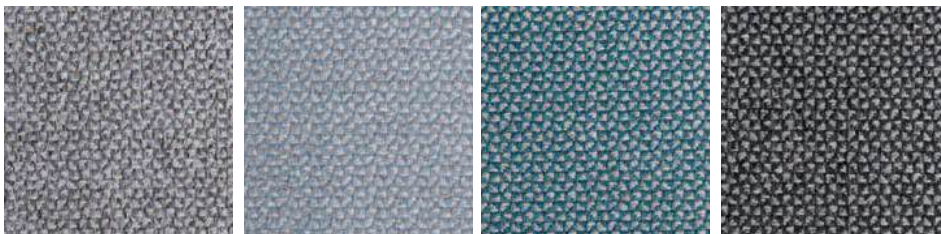

H 6

H 7

H 8

H 9

- Composition: 100% PES
- Abrasion: UNI EN ISO 12947-2 - <40.000 Martindale cycles
- Fire proof: UNI 9175 classe 1/M
EN 1021-1, EN 1021-2, CRIB 5
- Maintenance: Standard 60° C cotton cycle.

Visit www.flukso.it for complete colours range / Visionate la completa gamma colori su www.flukso.it

Progarden outdoor is geschikt voor:
Gianet opdek

GR Progarden Fabric / Tessuto Progarden



051
MEDITERRANEAN BLUE

026
PISTACHIO

028
OLIVE GREEN

012
LINEN

683
SLATE

- Composition: 100% yarn dyed acrylic
- Martindale (ISO 12947-2): 15.000 cycles
- Dimensional change after washing at 40°C and drying (warp/weft) (ISO 5077): ± 2%/0%
- Breaking strength (warp/weft) (ISO 13934-1): 200/70 daN
- Elongation at break (warp/weft) (ISO 13934-1): 25%/25%
- Tear strength (warp/weft) (ISO 13937-1): 7/3,7 daN
- Resistance to seam (warp/weft) (ISO 13935-1): 50/50 daN

- Air permeability (ISO 9237): 65 l/m²/s
- Finishing: Water repellent Teflon/Scotchgard treatment, dirt repellent and anti-mould treatment
- Spray Test (ISO 4920): 4 out of 5
- UV Colour fastness (ISO 105 B02): 5/8 out of 8
- Colour fastness to weather (ISO 105 B04): 5/8 out of 8
- Colour fastness after washing at 40°C (ISO 105 C06): 5 out of 5

Visit www.giovanardi.com for complete colours range / Visionate la completa gamma colori su www.giovanardi.com

Maglia vinyl outdoor is geschikt voor:

Dame/Combo opdek, Epica/Capice, To-Go, Social-ize/Sally, Salt/Pepper, Nua/Hailey opdek en full, Nuta/Hailey lounge. Kasia/Calia opdek en full, Gianet opdek, Lilibet opdek

MG Maglia Vinyl Fabric / Tessuto Maglia Vinile



0003


0406

4203

5001

6025

4537

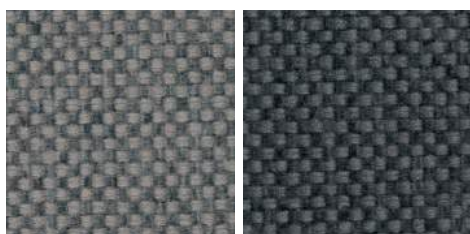

1702

6016

- Composition: Vynil 100%
- Abrasion: >100.000 cycles Martindale (EN ISO 12947:1999 Part 2)
- Fire Proof: EN 1021 Part 1 & 2, UNE 23.727-90 1R/M.2, NF P 92-503/M2, DIN 4102 B2, UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1.IM (UNO I EMME), ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten, ÖNORM A 3800 Teil 1, Qualmbildungsklasse Q1 - schwachqualmend, IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2, FMVSS 302, US: FAR 25/853, (MED) Marine Equipment Directive (in its current valid version), ECE R118.02 (replaces Directive 95/28/CE) Annexes 6, 7 & 8, EN 71-2:2006+A1:2007 - Safety of Toys - Parte 2: Flammability, CAL TB 117-2013, Section E
- Light Resistance: UV-Resistance XENOTEST DIN 54004/ NTC 1479

Visit www.spradling.eu for complete colours range / Visionate la completa gamma colori su www.spradling.eu

Silvertex (silverguard) outdoor is geschikt voor:

Brave/basket opdek, Dame/Combo opdek, Epica/Capice, Nuta/Hailey opdek, Nuta/Hailey lounge, Lilibet/Elisa opdek, Gianet opdek

SX Silvertex Fabric / Tessuto Silvertex



**3066
BALTIC**

**5020
BASIL**

**1014
UMBER**

**0002
SANDSTONE**

**4004
ICE**


**4003
GRAPHITE**

- Composition: 100% Vinyl / Polyester Backing
- Abrasion: >300.000 cycles Martindale (EN ISO 12947:1999 Part 2)
- UV Resistance: ISO 105 B04 ≥ 4/5 (Grey Scale), ISO 105 B02 ≥ 7/8 (Blue Wool Scale)
- Flame Retardancy: EU: EN 1021 Part 1 & 2
DE: DIN 4102 B2 ECE Regulation No.118:03 (R118.02 Annexes 6, 7 & 8), ES: UNE 23.727-90 1R/M.2, FR: NF P 92-503/M2, IT: UNI 9175 (1987) / UNI 9175/FA1 (1994)
Classe 1.1M (UNO I EMME), AT: ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten, AT: ÖNORM A 3800 Teil 1, Qualmbildungsklasse Q1 - schwachqualmend, IMO FTP 2010
Code MSC.307 (88) Part 8 3.1 & 3.2, (MED) Marine Equipment Directive (in its current valid version), EN 71-2:2006+A1:2007 - Safety of Toys - Parte 2: Flammability, US: CAL TB 117-2013, Section E, FMVSS 302, FAR 25/853

Visit www.spradling.eu for complete colours range / Visionate la completa gamma colori su www.spradling.eu

Fortezza is geschikt voor:

Nuta/Hailey lounge

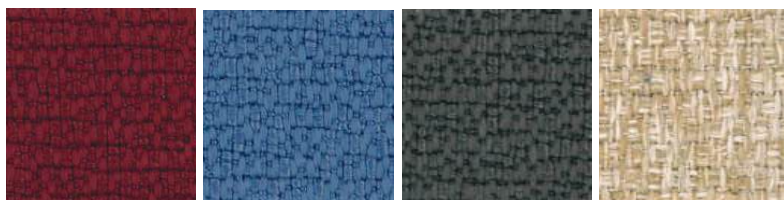

69-1

67-1


41-1

23-1

- Composition: 100% Polyolefinic
- Abrasion: UNI EN ISO 12947 35.000 rubs/cicli
- Seam slippage: BS 2543
- Pilling: UNI EN ISO 12945-2
- Colour fastness Dry Rubbing: UNI EN ISO 105-X12
- Colour fastness Wet Rubbing: UNI EN ISO 105-X12
- Light Fastness: UNI EN ISO 105-B02, UNI EN ISO 105-B04
- Colour Fastness to Sea Water: UNI EN ISO 105:E02:1996
- Colour Fastness to Chlorinated Water: UNI EN ISO 105:E03:2010
- Fire proof: UNI 8456 - 9174 - CLASS 1 - ITALIAN FIRE SAFETY CLASSIFICATION - PASS BS EN 1021.1 : 1994 - SOURCE 0 - CIGARETTE TEST - PASS BS EN 1021.2 : 1994 - SOURCE 1 - BUTANE FLAME - PASS ON FR FOAM T.B. 117 (2013); SECTION 1 POSITIVE B1 ACCORDING TO DIN 4102, PART 1 (MAY 1998) NFPA 260:2013 - CLASS 1 IMO 2010 FTP CODE PART 8 - Resolution MSC 307(88) - Cigarette and Match Test EN 13773 (2004) CLASSE 1

Visit www.primafabrics.it for complete colours range / Visionate la completa gamma colori su www.primafabrics.it

Fortezza is geschikt voor:
Nuta/Hailey lounge

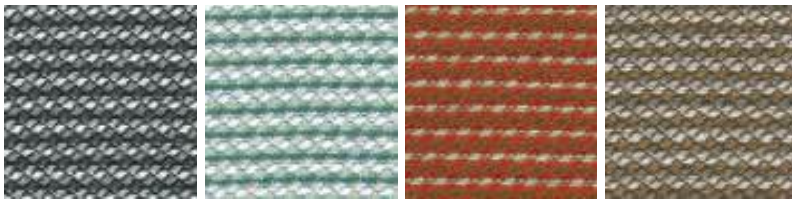

T5-1

T85-4

T100-1

T101-1

- Composition: 100% Polyolefinic
- Abrasion: UNI EN ISO 12947 35.000 rubs/cicli
- Seam slippage: BS 2543
- Pilling: UNI EN ISO 12945-2
- Colour fastness Dry Rubbing: UNI EN ISO 105-X12
- Colour fastness Wet Rubbing: UNI EN ISO 105-X12
- Light Fastness: UNI EN ISO 105-B02, UNI EN ISO 105-B04
- Colour Fastness to Sea Water: UNI EN ISO 105:E02:1996
- Colour Fastness to Chlorinated Water: UNI EN ISO 105:E03:2010
- Fire proof: UNI 8456 - 9174 - CLASS 1 - ITALIAN FIRE SAFETY CLASSIFICATION - PASS BS EN 1021.1 : 1994 - SOURCE 0 - CIGARETTE TEST - PASS BS EN 1021.2 : 1994 - SOURCE 1 - BUTANE FLAME - PASS ON FR FOAM T.B. 117 (2013); SECTION 1 POSITIVE B1 ACCORDING TO DIN 4102, PART 1 (MAY 1998) NFPA 260:2013 - CLASS 1 IMO 2010 FTP CODE PART 8 - Resolution MSC 307(88) - Cigarette and Match Test EN 13773 (2004) CLASSE 1

Visit www.primafabrics.it for complete colours range / Visionate la completa gamma colori su www.primafabrics.it



Camira - Blazer

Stofgroep 3

Blazer is geschikt voor:

Basket/Brave, Dame/Combo, Kanvas/Point, Jubel/Vertica opdek, Alhambra, Epica/Capice, Nuta/Hailey opdek, Panky/Set-Up

B Blazer Fabric / Tessuto Blazer



CUZ2Z




CUZ1E



CUZ86



CUZ47



CUZ1T



CUZ2R



CUZ3D



CUZ18



CUZ63



CUZ82



CUZ1N




CUZ1K




CUZ2X



CUZ62



CUZ1W



CUZ67

- Composition: 100% VIRGIN WOOL
- Abrasion: BS EN ISO 12497-2 65.000 Cycle Martindale
- Light Resistance-Xenotest: UNI EN ISO 105-B02 / 5
- Fire proof: BS EN 1021 Part 1, BS EN 1021 Part 2, BS 7176 Low Hazard, BS EN 13501-1:2007 Class D, NF D 60-013 AM18, UNI 9175:2010 Class 1IM, BS476 part 7 Class 1, ONORM B 3825, IMOFTP Code (part 8)
- Maintenance: Use the vacuum-cleaner.

Visit www.camirafabrics.com for complete colours range / Visionate la completa gamma colori su www.camirafabrics.com

SuperB is geschikt voor:

Basket/Brave, Dame/Combo, Nuta light/Hailey full, Epica/Capice, Social-ize/Sally, Salt/Pepper, Kasia/Calia

S Superb Trevira Fabric / Tessuto Velvet-Velluto



5130


5127

5131

5140

5134

5135

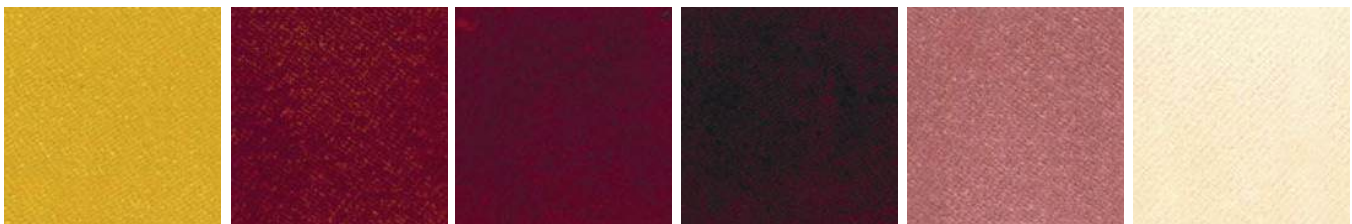

5106


5112

5118

5119

5114

5103

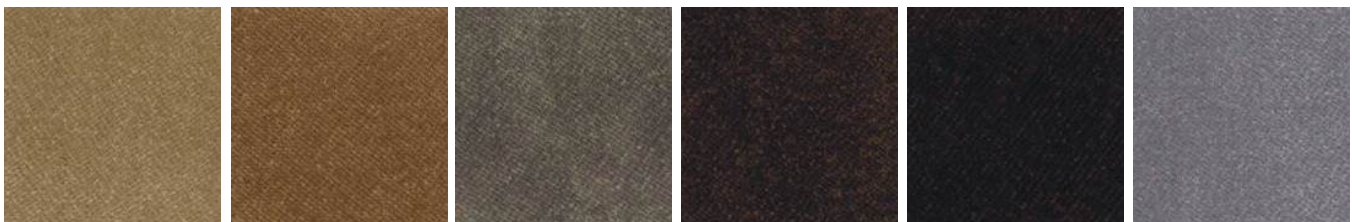

5144


5143

5149

5142

5145

5152

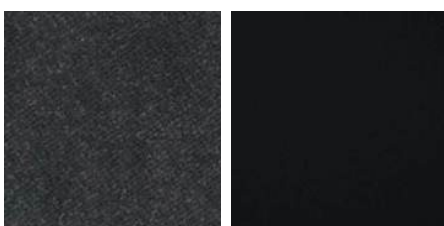

5151

5147

- Composition: 100% POLYESTER - TREVIRA CS
- Abrasion: UNI EN ISO 12947-2 100.000 Cycles
- Light Resistance-Xenotest: UNI EN ISO 105-B02 ≥ 5 Blue Scale
- Fire proof: UNI 8456 - 9174 classe 1, UNI 9175 classe 1IM, EN 1021-1
EN 1021-2, BS 5852 crib 5, DIN 4102 B1, NF P 92 503-507 M1, TB 117:2013
UNI EN 13773:2004 classe 1, NFPA 701:2015
- Maintenance: Dust gently or pass the surface with a damp cloth.

Visit www.flukso.it for complete colours range / Visionate la completa gamma colori su www.flukso.it

Steelcut 3 is geschikt voor:

Basket/Brave, Dame/Combo, Kanvas/Point, Jubel/Vertica, Nuta/Hailey opdek, Nuta/Hailey lounge, , Epica/Capice, Cucaracha/Rumba, To-Go, Social-ize/Sally, Salt/Pepper, Panky/Set-Up

DK Kvadrat Fabric (Steelcut3) / Tessuto Kvadrat (Steelcut3)




- Composition: 90% New wool worsted - 10% Nylon
- Abrasion: 100.000 Martindale rubs, EN ISO 12947
- Lightfastness: Note 5-7, ISO 105-B02
- AS/NZS 1530.3, BS 5852 crib 5 with treatment, BS 5852 part 1, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 11M, US Cal. Bull. 117-2013, EN 1021-1/2, AS/NZS 3837 class 2, ÖNORM B1/Q1, ASTM E84 Class A Unadhered, ASTM E84 Class B Adhered

Visit www.kvadrat.dk for complete colours range / Visionate la completa gamma colori su www.kvadrat.dk

Remix 3 is geschikt voor:

Basket/Brave, Dame/Combo, Kanvas/Point, Jubel/Vertica, Nuta/Hailey opdek, Nuta/Hailey lounge, Epica/Capice, Cucaracha/Rumba, To-Go, Social-ize/Sally, Salt/Pepper, Panky/Set-Up


DK Kvadrat Fabric (Remix3) / Tessuto Kvadrat (Remix3)

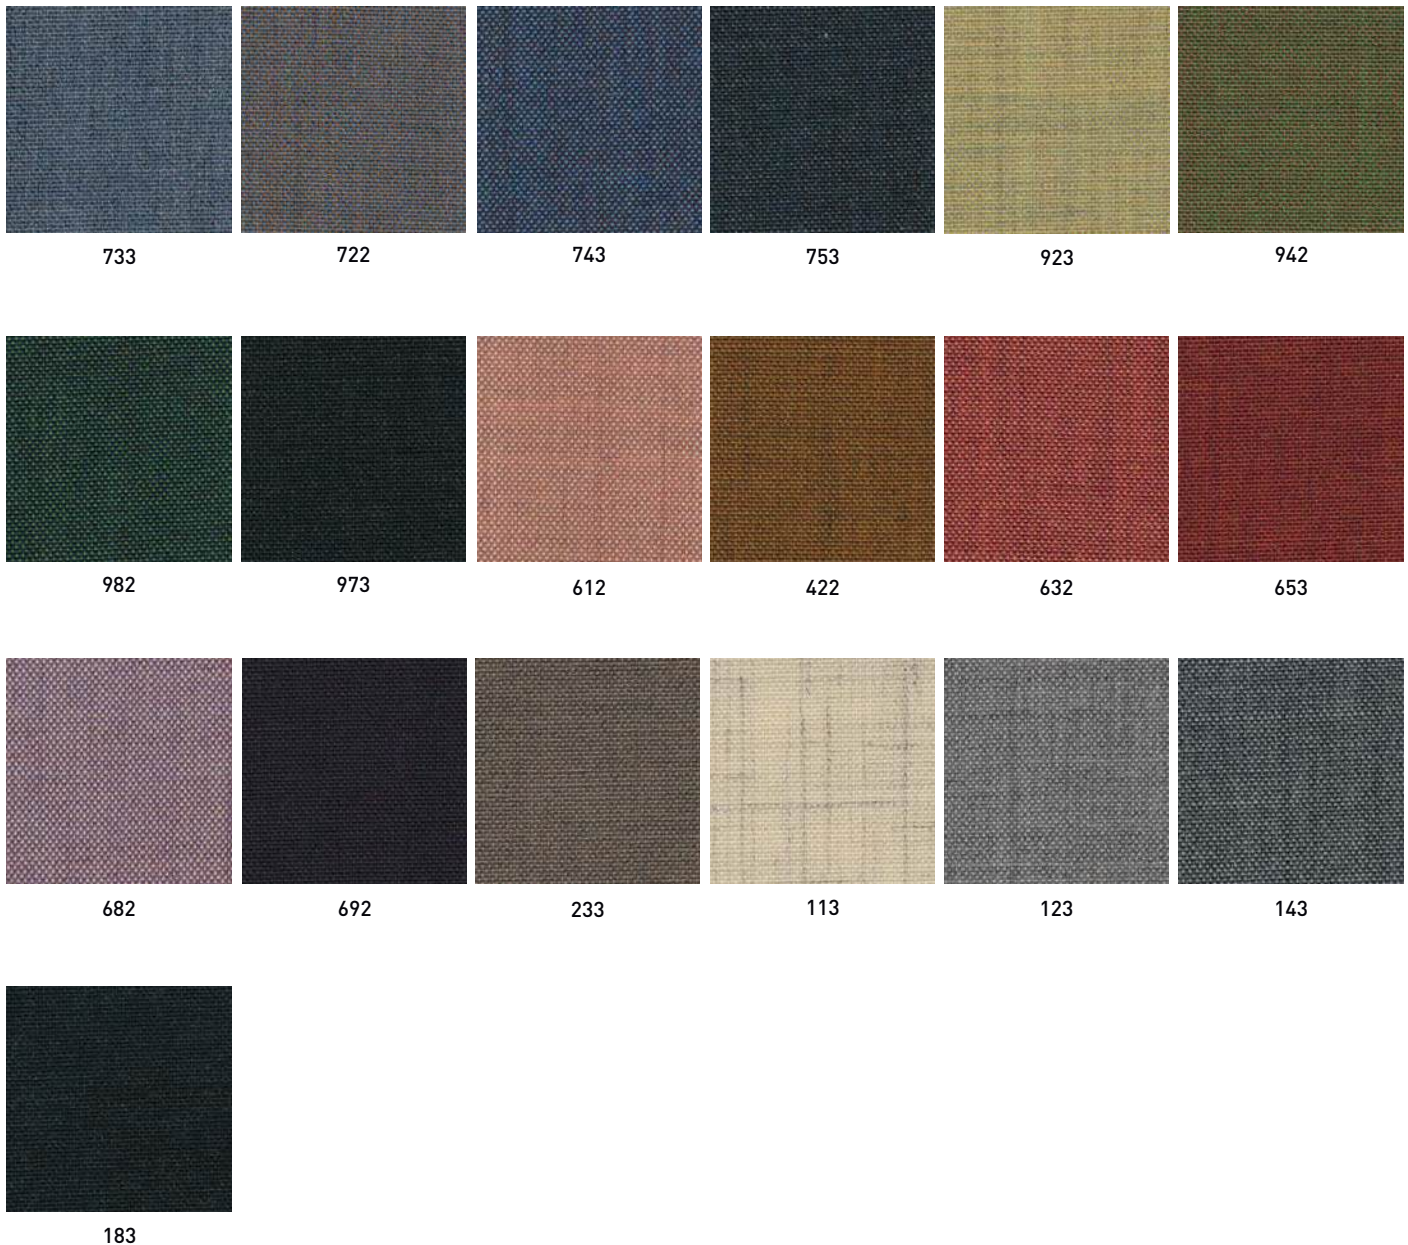

- Composition: 90% wool, 10% nylon
- Abrasion: Approximately 100.000 Martindale rubs, EN ISO 12947
- Lightfastness: Note 5-7, ISO 105-B02
- AS/NZS 1530.3, BS 5852 crib 5 with treatment, BS 5852 ignition source 3, BS 5852 part 1, IMO FTP Code 2010 Part 7 with treatment, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 11M, US Cal. BulL. 117-2013, EN 1021-1/2, AS/NZS 3837 class 2, ÖNORM B1/Q1, ASTM E84 Class A Unadhered, ASTM E84 Class A Adhered, GB 50222 B1 with treatment

Visit www.kvadrat.dk for complete colours range / Visionate la completa gamma colori su www.kvadrat.dk

Fortezza 93 is geschikt voor:
Hailey lounge/Nuta lounge

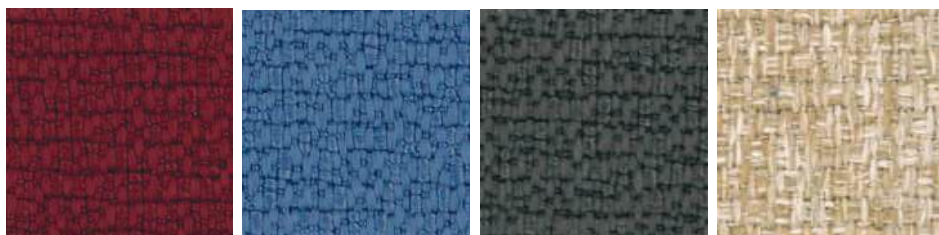

69-1

67-1

41-1

23-1

- Composition: 100% Polyolefinic
- Abrasion: UNI EN ISO 12947 35.000 rubs/cicli
- Seam slippage: BS 2543
- Pilling: UNI EN ISO 12945-2
- Colour fastness Dry Rubbing: UNI EN ISO 105-X12
- Colour fastness Wet Rubbing: UNI EN ISO 105-X12
- Light Fastness: UNI EN ISO 105-B02, UNI EN ISO 105-B04
- Colour Fastness to Sea Water: UNI EN ISO 105:E02:1996
- Colour Fastness to Chlorinated Water: UNI EN ISO 105:E03:2010
- Fire proof: UNI 8456 - 9174 - CLASS 1 - ITALIAN FIRE SAFETY CLASSIFICATION - PASS BS EN 1021.1 : 1994 - SOURCE 0 - CIGARETTE TEST - PASS BS EN 1021.2 : 1994 - SOURCE 1 - BUTANE FLAME - PASS ON FR FOAM T.B. 117 (2013): SECTION 1 POSITIVE B1 ACCORDING TO DIN 4102, PART 1 (MAY 1998) NFPA 260:2013 - CLASS 1 IMO 2010 FTP CODE PART 8 - Resolution MSC 307(88) - Cigarette and Match Test EN 13773 (2004) CLASSE 1

Visit www.primafabrics.it for complete colours range / Visionate la completa gamma colori su www.primafabrics.it